



# User Guide

## Insite Analytics 1.3



## Copyright Terms and Conditions

---

The content in this document is protected by the Copyright Laws of the United States of America and other countries worldwide. The unauthorized use and/or duplication of this material without express and written permission from HelpSystems is strictly prohibited. Excerpts and links may be used, provided that full and clear credit is given to HelpSystems with appropriate and specific direction to the original content. HelpSystems and its trademarks are properties of the HelpSystems group of companies. All other marks are property of their respective owners.

201901021258

# Table of Contents

<b>Welcome</b>	<b>5</b>
What Is in This Guide	5
Document Conventions and Symbols	5
Contacting HelpSystems	6
Get the Latest Version of Insite Analytics	6
Insite Analytics Requirements	6
<b>Home</b>	<b>7</b>
Licenses	8
<b>Query Builder</b>	<b>11</b>
Query Builder Interface	11
Work with Queries	12
Create a New Query	17
Edit Existing Queries	39
<b>Data Connection Management</b>	<b>49</b>
Data Connections Interface	49
Work with Data Connections	49
Create a New Data Connection	50
Edit Data Connections	55
<b>Index</b>	<b>57</b>



# Welcome

Welcome to the *Insite Analytics* User Guide. This guide is document version 1.3. For more information on document version, see Document Conventions and Symbols below.

1.3 | 201901021258 | January 2019

## What Is in This Guide

This user guide provides detailed information on the following areas that make up Insite Analytics:

**The Query Builder** - Here you will learn how to create queries by adding tables, selecting data columns, sorting output, and filtering records. Once saved you will see how easily you can manage, work with, and edit your queries.

**Data Connection Management** - Data connections link your queries to the different systems and databases across your network where your data is stored. You will see how to create these data connections so you can reference them in your queries.

## Document Conventions and Symbols

This user guide conforms to the following conventions:

- In step-by-step procedures, the following are in bold type: buttons, icons, tabs, or words that you click, and keys that you press.  
For example: On the **Document** tab, click **Delete Page**.
- In step-by-step procedures, a selection in a drop-down list that you should choose is in bold type, but when you have more than one equally valid choice in a drop-down list, those selections are in italic type.
- In step-by-step procedures, words, letters, numerals, or symbols that you type into a text box or field are in both bold and italic type.  
For example: Type ***GO ABCXYZ*** on a command line.
- The document version, shown on the first page of this guide, denotes both the Insite Analytics software version this guide represents and document draft for the release. The document version is in the format X.Y.ZZ.N, where X.Y.ZZ represents the Insite Analytics software version and N represents the document draft number.  
For example: If the document version is noted as 1.0.0.1, then the information in this guide is current as of Insite Analytics version 1.0.0, and this guide is the first release of the guide for that version.
- Typically with Insite Analytics, as with most software applications, there are several ways to accomplish the same thing. This guide shows one simple way to perform an action, usually by clicking.

# Contacting HelpSystems

Please contact HelpSystems for questions or to receive information about Insite Analytics. You can contact us to receive technical bulletins, updates, program fixes, and other information via electronic mail, Internet, or fax.

## **For general HelpSystems Information**

HelpSystems can be reached by calling 952-933-0609.

## **For technical support or information**

Call our general number 952-933-0609, and ask for technical support.

-or-

Send an E-mail to [support.sequel@helpsystems.com](mailto:support.sequel@helpsystems.com).

## **For information on HelpSystems products, services, and partner programs**

Go to the Sequel product page: [www.helpsystems.com/sequel](http://www.helpsystems.com/sequel).

## **To download documentation, software, or the latest program fixes**

Go to your account page at [www.helpsystems.com/user](http://www.helpsystems.com/user).

# Get the Latest Version of Insite Analytics


After the initial installation of Insite Analytics, updates can be found on [Customer Portal download page](#).

Check your current version by opening **Account \ Getting Started** from the Insite side menu.


# Insite Analytics Requirements

As part of HelpSystems Insite, Insite Analytics requires what Insite requires. For more information and a full list of requirements, see the Knowledge Based article, [HelpSystems Insite System Requirements](#).


# Home

The home page displays after you log onto the Insite server. If you have more than one Insite product, press the **Choose Product** button .

The Select Product panel opens.

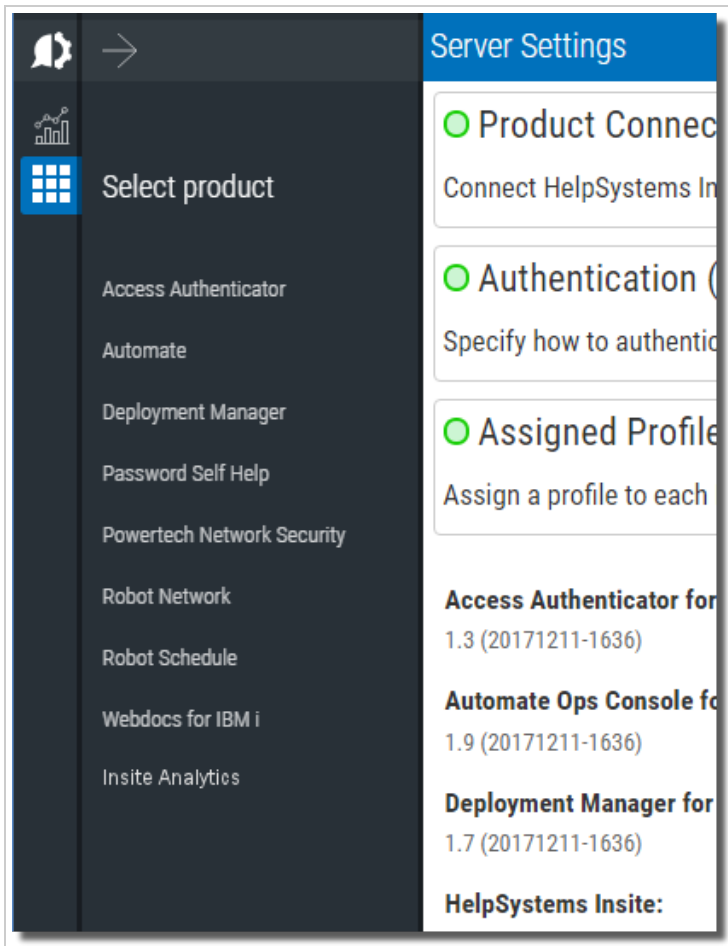

Click on **Insite Analytics** to display the Insite Analytics home page.

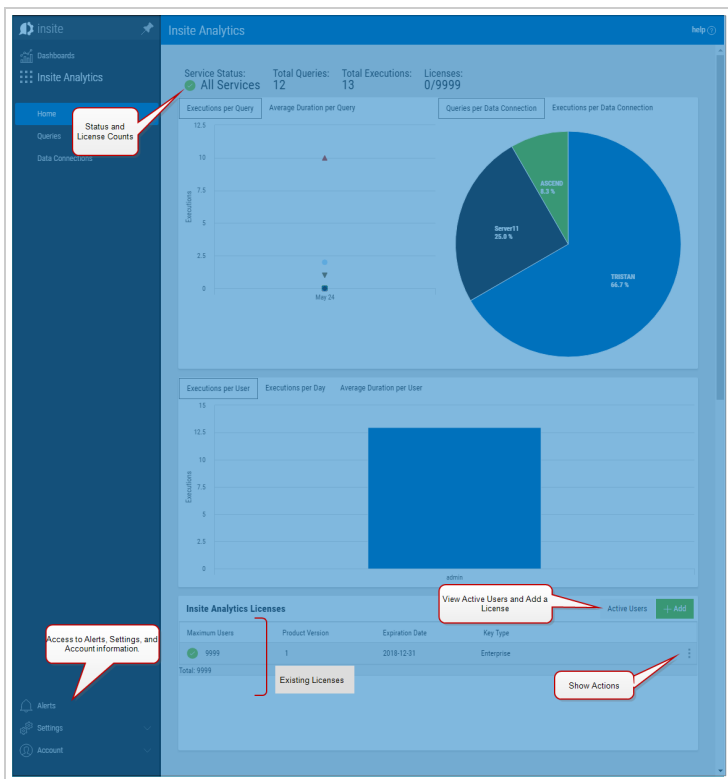

The home screen lists current license information and provides access to the following.

- [Queries](#)
- [Data Connections](#)
- [Insite Analytics Licenses and Active Users](#)


**TIP:**

Access to the Query Builder, licensing information, and data connections can be controlled by adding users to [Security Groups](#) (select **Security Groups** from the Settings menu on the left of the home screen), and granting or revoking permission to these items.

## Licenses

Current licenses are displayed at the bottom of the Home page. From here you can add or delete licenses, and view active users.


On this screen you can see the following:

- Overall status of the services.
- A graph of executed queries over time.
- A count of licenses used out of the total number of available licenses.
- A list of applied and expired licenses.
- Show Actions menu. Click  to access the available functions.




## Add a License

### Steps

1. From the Home page, press the **Add License** button  .

The Apply New License panel opens.

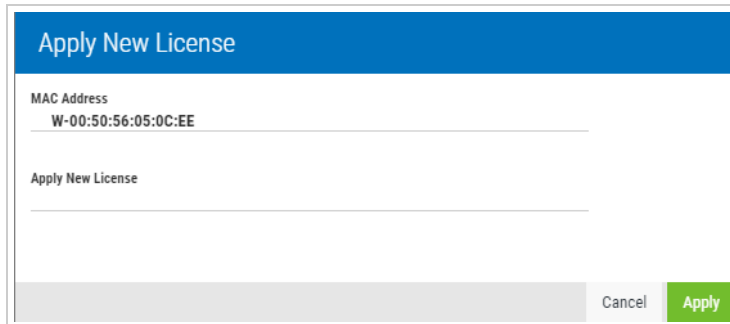


2. Enter the new license and press the **Apply** button.

**NOTE:**

- The license count at the top of the screen is a cumulative amount.
- You can only enter one of each type of license (trial and permanent).
- If you have one trial license applied, you have to delete it before applying another.

## Delete Existing Licenses


### Steps

1. Click the **Show Actions** button  located on the left of each license, and select **Delete**
2. You will be prompted to confirm or cancel your request.

## Active Users

1. Press the **Active Users** button  .

The Active Users panel opens on the right.

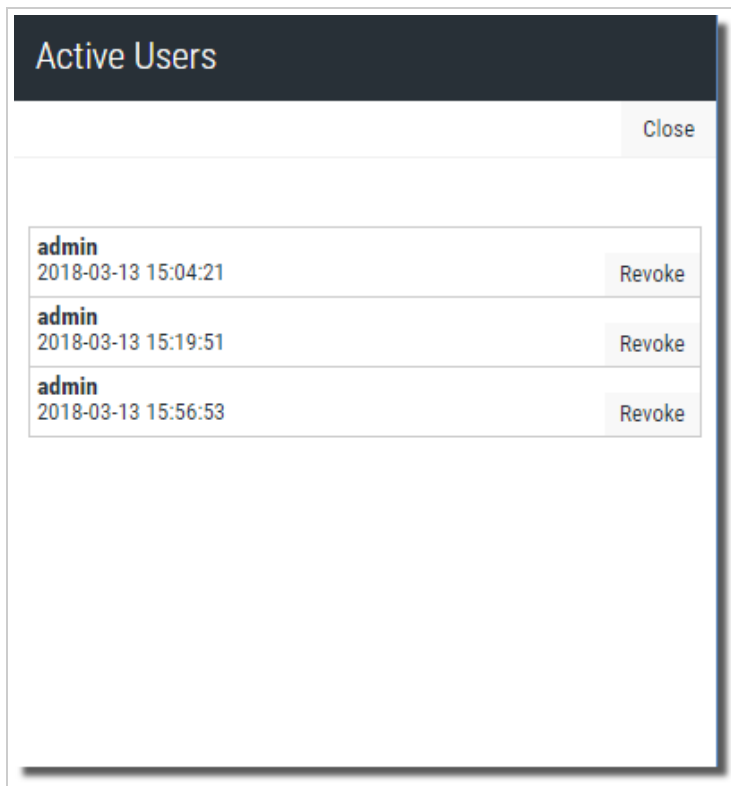

2. To disconnect a user, press the **Revoke** button.

# Query Builder


Insite Analytics Query Builder (or simply Query Builder) allows you to create inquiries across your entire network on different systems in order to gather data that can be displayed in Insite Dashboard graphs, and charts.

Data security is enforced using third party authentication and system level data access restrictions based on users, groups, and objects.

Query Builder makes it easy to [work with](#), [create new](#) and [edit existing](#) queries.

## Query Builder Interface

Select the **Queries** option Queries in Insite Analytics to display a list of queries like so:

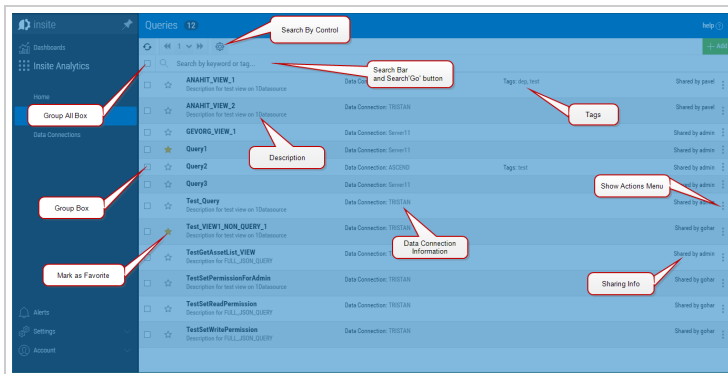

**NOTE:**

You will only see queries that you own (created), or queries that have been shared with you.

On this screen you can see the following:


- Group Actions Check Box.
- Search by Control.
- Search Bar.
- The name of the query.
- The system/data connection.
- Sharing information.
- The description of the query.
- Any Tags
- Show (Query) Actions menu.
- Add Query Button.
- Help button.

# Work with Queries

As the number of queries grow, there are several features available to help you work with, and manage your queries.


## Group Actions


Check the box to the left of each query, or the top box to select all queries.

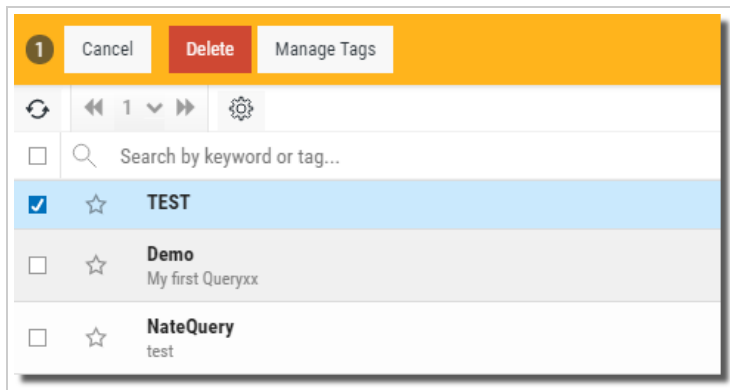

Available actions are displayed along the top of the screen, and can be applied to the checked items.


## Sorting


The list of queries can be sorted by query name. Press the **Settings** button  to select ascending or descending.

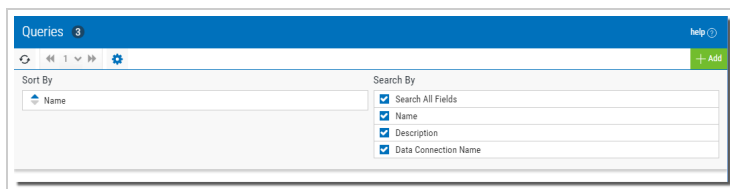


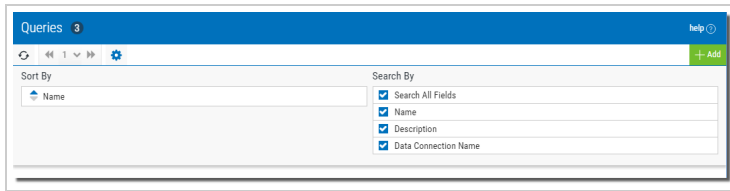
## Searching / Filtering

Use searching (filtering) to move through your list of queries and find queries quickly and easily. Enter words, phrases and tag values in the search entry to filter and find queries.

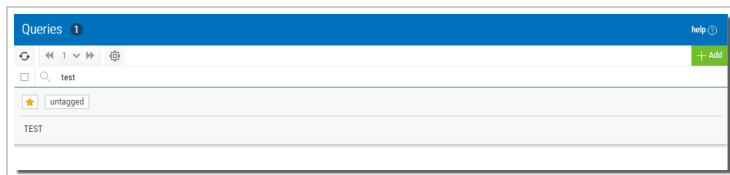


Notice the mini list of found objects as you enter your search string or tag names. Press the **Search** button  to change the displayed list of queries.

Press the **Settings** button  to define any limits to your search. In the **Search By** list, select areas to focus your search.



## Favorites

Check the star next to the query name to mark it as a favorite. You can then press the star in the top search area to limit queries to a list of favorites.

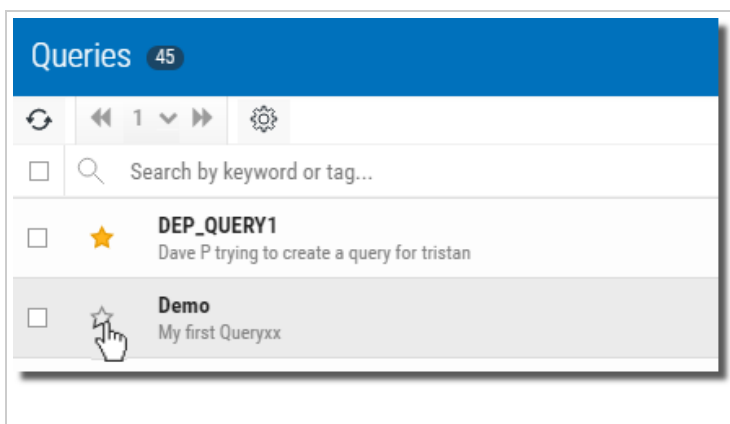

## Tags

Tags (keywords) can be created and assigned to queries to provide another method for organizing queries. In the Query Actions menu ([shown below](#)) select Manage Tags.

## Show (Query) Actions

The Query Actions menu is available to the right of every query in the list, and provides access to the following functions:


### Edit

Use this option to make changes to existing queries.

#### Steps:

1. Press the **Show Actions** button  and select the **Edit** option.


The option first displays the Edit Query panel on the right. Here you can make quick changes to the description, tags, caching, groups, and so on. See [Query Attributes on page 17](#) for more details.

2. Press the **Edit Query** button  to open the query editor. See [Edit Existing Queries on page 39](#) for more details.


## Duplicate

Use this option to create a duplicate copy of any existing query.

### Steps:

1. Press the **Show Actions** button  and select the **Duplicate** option. The Duplicate Query panel opens.

The image shows a 'Duplicate Query' dialog box. It has a blue header bar with the text 'Duplicate Query'. Below the header, there is a label 'Name' followed by a text input field containing 'Query01\_duplicate'. At the bottom of the dialog, there are two buttons: a grey 'Cancel' button and a green 'Duplicate' button.

2. Overwrite the suggested name (or not), and press the **Duplicate** button  .


The new duplicated query will appear in the query list.

## Tags


Use this option to create, edit and delete query tags.

### Steps:


Press the **Show Actions** button  and select the **Tags** option. The Manage Tags panel opens on the right of the display.

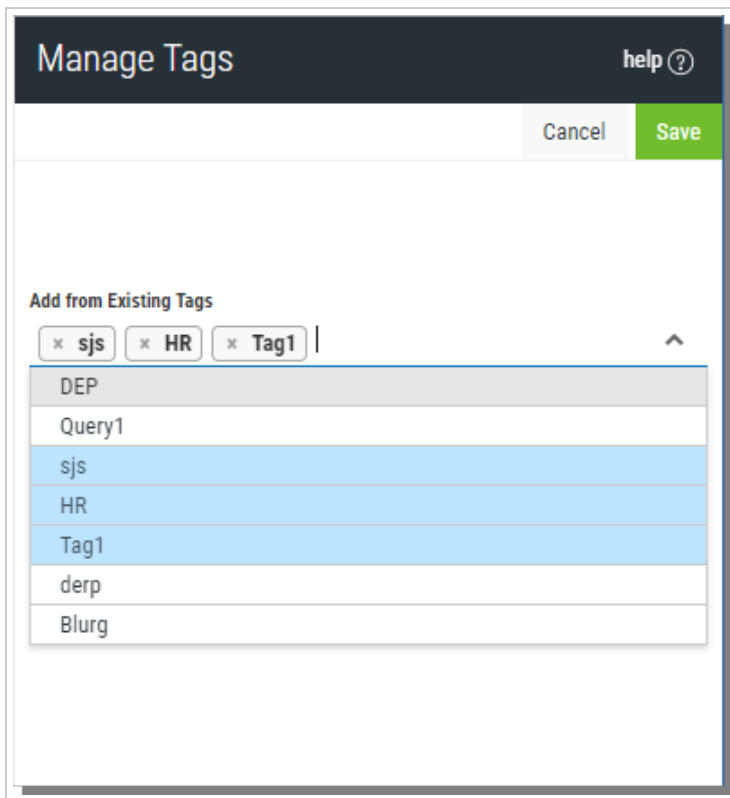


#### To create a new tag:

1. On the tag entry line type a new tag and press enter. This tag will be added to the query you stated with, and it will also be available to all other queries via the Show Actions menu for each query.
2. Press **Save**  when done.

#### To add an existing tag:

1. Use the drop-down list to select, or type the name of a tag, if you know it, and the list will filter so you can quickly add.
2. Press **Save**  when done.

#### To remove a tag from a query:

1. Click the x inside the tag to delete from the selected list, or backspace over it.
2. Press **Save**  when done.

## Download

Use this option to create and download query results as a .CSV file.

#### Steps:

1. Press the **Show Actions** button  and select the **Download** option (you may be prompted

for credentials in order to access the query).

A window displays so you can give the file a name.

If the query uses a defined parameter, the window will also include the Parameter.

You can use the default value, or enter a different value.

2. Press the **Download** button  and the browser will display the progress.

The file is saved in the Windows Downloads folder.

## Description File

Use this option to create a text file containing the description of the query.

Press the **Show Actions** button  and select the **Description File** option. A text file is saved in the Windows Downloads folder.

## Favorite

Use this option to denote the query as a favorite.

## Delete


Use this option to delete an existing query.

### Steps:

1. Press the **Show Actions** button  and select the **Delete** option.

A second screen displays to confirm your request or cancel.



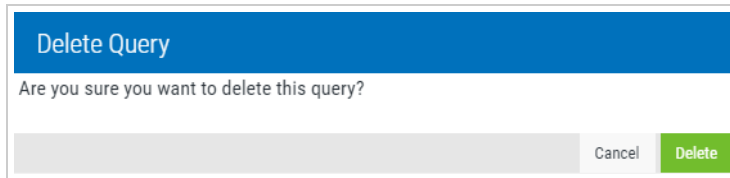

2. Press the **Delete** button  .

## Close

Press to close the Show Actions panel.

# Create a New Query

Creating a new query is fast and easy using the Query Builder Wizard Mode (the default). During the creation process you will be able to:

- Add and Join tables
- Choose, edit and create columns
- Create grouped results
- Filter results
- Sort results
- Create and add parameters


To start press **Add Query**  .

### NOTE:

If you use IBM BRMS, and have at least one defined BRMS [data connection](#), you can create a query by starting with a pre-defined [BRMS query template](#).

## Query Attributes

The New Query panel opens on the right.

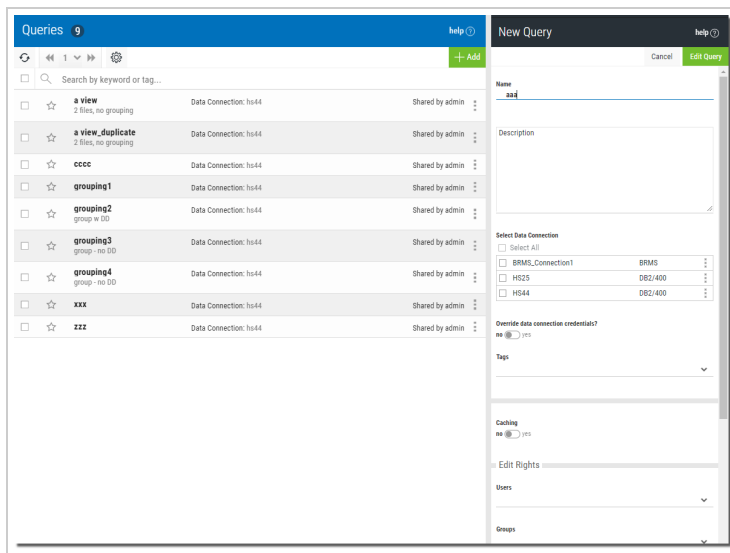

Fill in the options (described below) and press **Edit Query** Edit Query to continue.

### Options

**Name** - Enter a name for the query. Only alphanumeric characters (a-z, A-Z, 0-9)—not including punctuation or symbols—are allowed.

**Description** - Enter text to describe the query. Any character value is allowed—even spaces.

**Select Data Connection** - Use the drop-down to select a data connection (location of the data tables) for the query. See [Data Connection Management on page 49](#) for more on this topic.

#### **WARNING:**

When changing data connections for existing queries, you can only select connections with the same driver type (MySQL, Oracle, DB/400, and so on).

Multiple data connections can be selected for a single query as long as they are the same connection type and have the same schema. This allows for data to be merged together, or in a dashboard you can select each connection separately to control from which data source (connection) to pull the data.



When you select one datasource, all other similar (type and schema) connections will be filtered and presented for selection. Select additional connections to add them to the query. Choosing the '**Select All**' option is similar to choosing all connections individually, but it will also use any future data connections of the same type.

**Override Data Connection Credentials?** - Use this option to provide a different user credential for this query. This user will override the [credential](#) (user) defined in the selected data connection.

**No/Yes:** Set the switch to yes to override. This will expose the username and password.

**Username:** Enter a valid username to run the query.

**Password:** Enter the password for the specified username.

**TIP:**

Although the user can be overridden in the query, this should be used sparingly. In the case where passwords expire you will only have to update the data connection vs. updating many queries that have user overrides.

**Tags** - Add tags to aid in searching. Tags can be created, added and remove as described in [Tags on page 14](#). This is optional.

**Caching** - Set to cache the results for the query.

**No:** This is the default value. Select this option to ensure results are processed 'fresh' when the query is run.

**Yes:** Set to turn caching on for the query. The results will be held based on the *Permanence* setting below:

**Permanent** - This option is available only if **Caching** is set to 'Yes'. Select if you want the caching for the query to be permanent.

**No:** This is the default value. The length of time the results of the query are cached is based on the *Expires* setting below.

**Yes:** The query will always cache its initial results.

**Expires:** This option is available only if **Permanent** is set to 'No'. Use the drop-down to choose one of the following durations to determine how long to retain the initial results: Daily, Weekly, Monthly, Quarterly, or Yearly.

## Caching Explained.

Caching is a mechanism that saves the results of a query for a specific moment in time. It is useful for both for *performance* reasons and so that the query can freeze a *moment in time*.

**Performance:** Consider a scenario where a user creates a query, adds it to a dashboard, and then shares it with the entire company (500 employees) who all open the dashboard at the same time.

If data caching is used, the first time the Query is run the query will execute the SQL statement once, and save the results. Subsequent users will get the cached data, preventing the query from running 500 SQL statements.

**Moment in Time:** This is an attempt to freeze non-time series data to a specific moment in time. Data often changes over time in the database, but users may want to show the data as it was at the time they authored the query.

For example, a query might show current EOY sales numbers on Dec 31st, 2017. The CEO creates a dashboard over this Query and sends to the whole Company. Over the course of January 2018 additional sales are made, and the data continues to change. If/when a user opens the CEO's dashboard on January 23rd, 2018, you want them to see the dashboard as the CEO saw it on Dec 31st. To see the same cached data forever, make it Permanent.

**Edit Rights** - Select using the drop-down list to grant editing rights to users and/or groups.

**Users:** Choose any of the listed users to allow editing rights to the query.

**Groups:** Choose any of the listed groups to allow editing rights to the query.


**Share With** - Select using the drop-down list to share the query with users and/or groups.

**Users:** Choose any of the listed users to share the query with.

**Groups:** Choose any of the listed groups to share the query with.

## Query Editor Layout

After the initial values (above) are defined and saved the Query Editor displays:

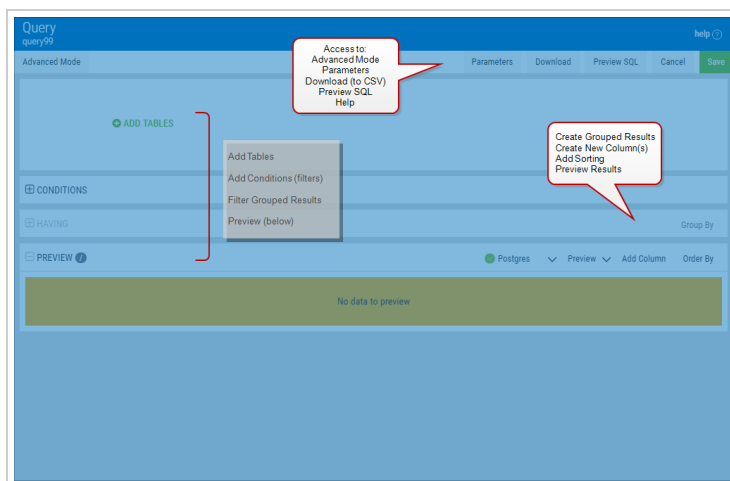

On this screen you can see the following:

- The main design section broken into 'bands' for Tables, Conditions (filters), Filtered Grouped Results, and the Preview.
- Buttons along the top to access: Advanced Mode, Parameters, Download (to CSV), Preview SQL and Help.
- Buttons on the bottom two bands to:
  - [Add Grouped Results on page 28](#)
  - [Add \(create\) a New Column on page 27](#)
  - [Add Sorting on page 35](#)
  - [Preview Results on page 22](#)


From here you can create your query and:


- [Add Tables on page 23](#)
- [Add and Create Columns on page 25](#)
- [Add Grouped Results on page 28](#)
- [Add Record Selection Conditions on page 32](#)
- [Add Sorting on page 35](#)
- [Add Parameters on page 36](#)

## Editor Options

### Advanced vs. Wizard Mode

By default the query editor operates in Wizard Mode. This creates logical steps to the creation process (adding tables, joins, columns, sorting, and so on). Switching to Advanced Mode allows you to review and modify the existing SQL.

To access this mode press the **Advanced Mode** button  at the top of the editor. This button toggles between the two modes. The editor changes to display the SQL.

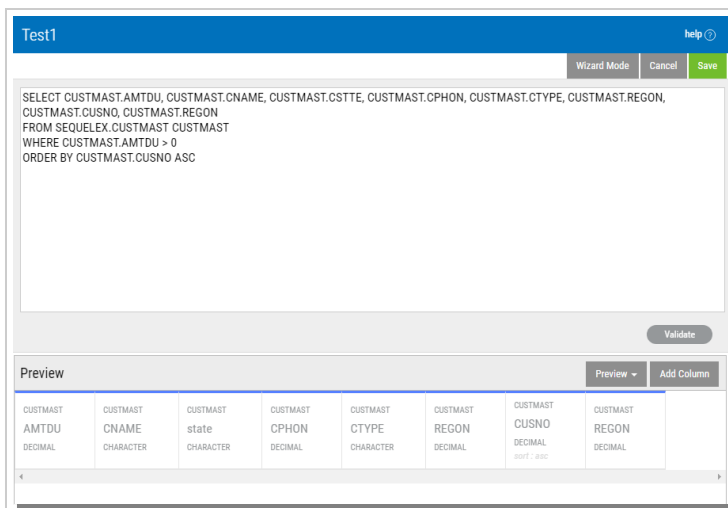

To switch back press the **Wizard Mode** button .

## Parameters


Press the **Parameters** button  to [create](#) new, or [edit](#) existing parameters.

## Download (CSV File)

Use this option to create and download query results as a .CSV file.

1. Press the **Download** button .

A window displays so you can give the file a name.

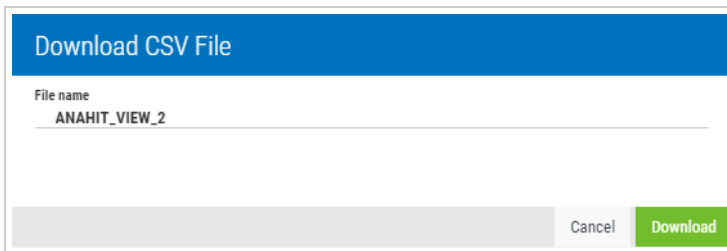



The dialog box titled "Download CSV File" has a text input field for "File name" containing "ANAHIT\_VIEW\_2". At the bottom right are "Cancel" and "Download" buttons.

2. Press the **Download** button  and the browser will display the progress.

The file is saved in the Windows Downloads folder.

## Preview SQL

Press the **Preview SQL** button  to quickly review the SQL for the query.

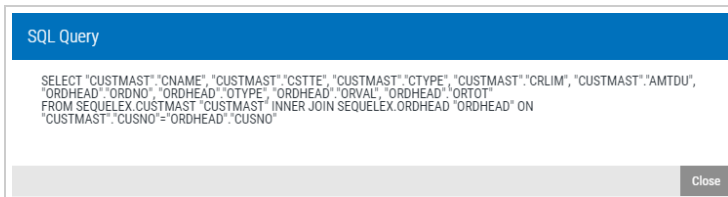


The window titled "SQL Query" displays the following SQL code:

```
SELECT "CUSTMAST"."CNAME", "CUSTMAST"."CSTTE", "CUSTMAST"."CTYPE", "CUSTMAST"."CRLIM", "CUSTMAST"."AMTDU",
"ORDHEAD"."ORDNO", "ORDHEAD"."OTYPE", "ORDHEAD"."ORVAL", "ORDHEAD"."ORTOT"
FROM SEQUELEX.CUSTMAST "CUSTMAST" INNER JOIN SEQUELEX.ORDHEAD "ORDHEAD" ON
"CUSTMAST"."CUSNO" = "ORDHEAD"."CUSNO"
```


A "Close" button is located at the bottom right.

The contents of this display cannot be edited.

## Preview Results

While in the query editor you can quickly preview the results of the query. Press the **Preview** button  to display sample results. Use the down arrow to select the number of sample records to process. The bottom half of the display fills with results.

The data connection used by the query is displayed. If your query uses multiple data connections, you will see them listed (use the arrow to expand) along with their connection status.

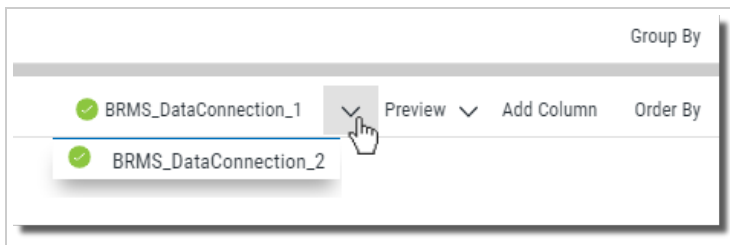**NOTE:**

For multi-connection queries, only the first connection is used for preview results.

## Add Tables

In order for your query to return results you must add to it at least one table. Sometimes you may have to add multiple tables to capture all the data for a given request. In this case you will need to [join tables](#) together.


The tables you use (and need), and how they should be joined is determined by the database design, and how files in the database relate to each other. This information can be learned over time, or provided by someone in your organization.

The process below to add tables is the same for new queries, and for [modifying](#) existing queries (once opened in the editor). To remove tables, or modify the join see the topics, [Add or Remove Tables on page 41](#), and [Modify or Delete the Join on page 42](#).

### Steps


1. Once in the Query Editor (see [Create a New Query on page 17](#) for information) press the **Add Tables** button


The Add Table panel opens on the right.

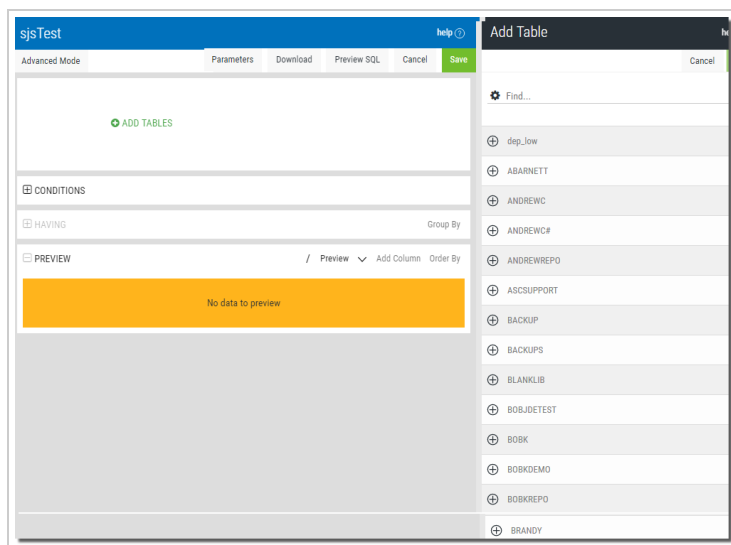


2. Use the drop-down list to select, or type the name of a table if you know it, and the list will filter so you can quickly add.

3. Click to select a table like so:

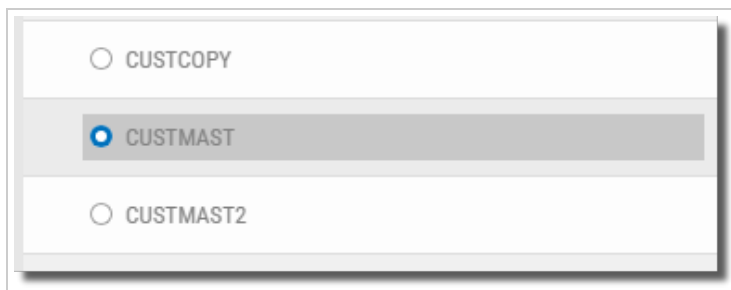

4. Press the **Save** button  to add the table to the editor.


The query editor displays the selected table(s) in the top section, and all the columns in the table like so:

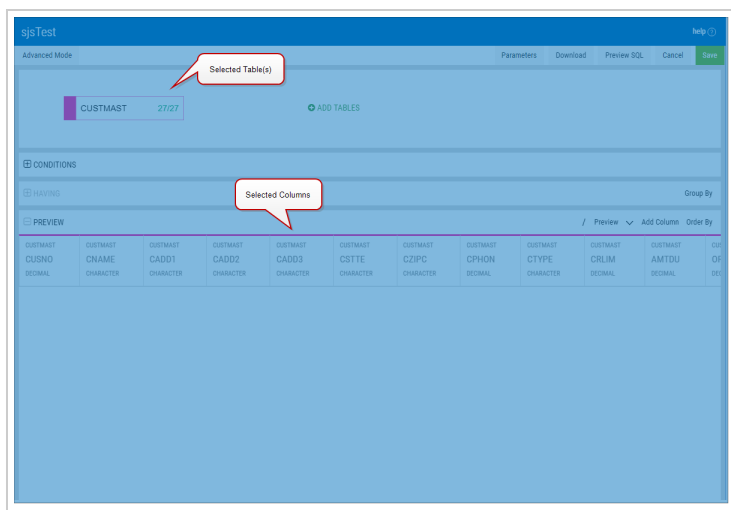

5. To add additional tables, repeat the process starting at step 1.

## Join Tables

Selecting more than one table for your query opens the Modify Join panel on the right.

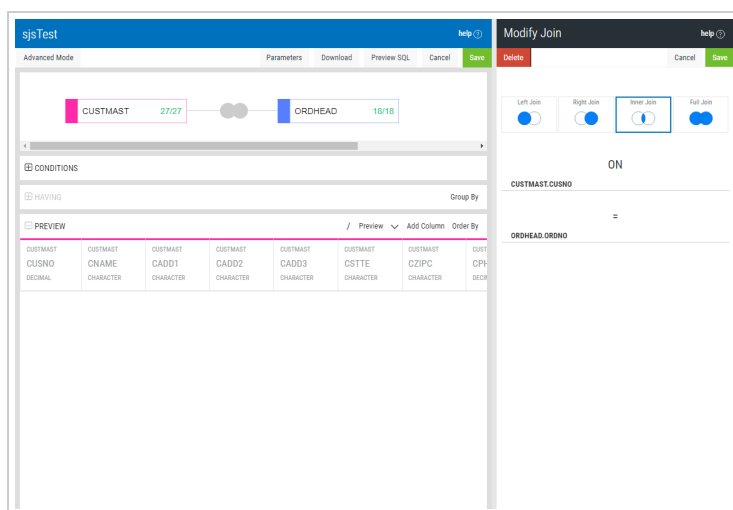





## Steps

1. Choose one of the four join options.

The different types will produce the following results:



Left Join - Return all rows from the left table plus any matched rows in the right table.




Right Join - Return all rows from the right table plus any matched rows in the left


table.




Inner Join - Return only matched rows between both tables.



Full Join - Return all rows from each file plus any matched rows.

2. In the 'ON' section, use the drop-down for each table pair to select the column(s) to join the tables on. You can type partial column names to search.
3. Press the **Save** button  .

The query editor displays the two tables with the join like so:

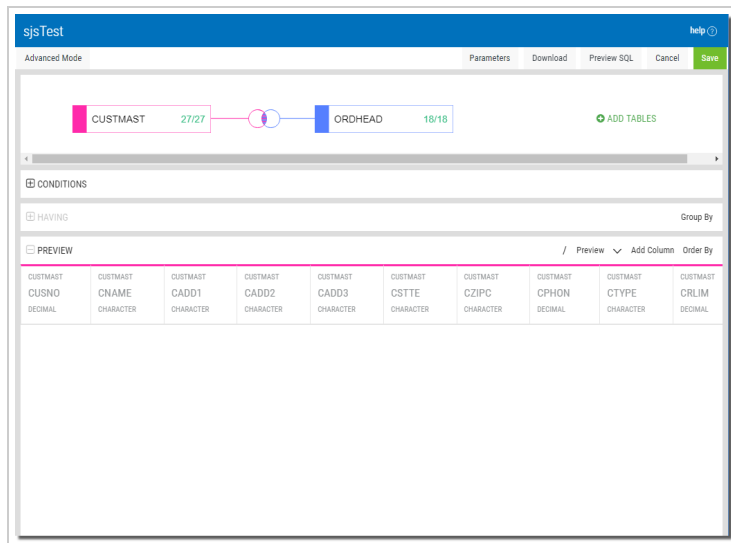

Repeat this process for each file you wish to add.

## Add and Create Columns

As with tables, you need at least one column (or all columns) in a query to display meaningful information. The assumption here is that your query has at least one table selected. In the query builder you can add, rename, create new, group by, remove, and sort columns.


The processes below are the same for new queries, and for [modifying](#) existing queries (once opened in the editor). To modify, re-sequence, or remove columns, see the topic, [Modify Columns on page 43](#).

## Select Existing Columns


### NOTE:


By default, every time a file is added to a query all columns are selected and added to the query.

### Steps

1. Once in the Query Editor (see [Create a New Query on page 17](#) for information) press the table icon  for the table containing the columns you wish to work with.

The Edit Table panel opens on the right showing all the columns in the table.

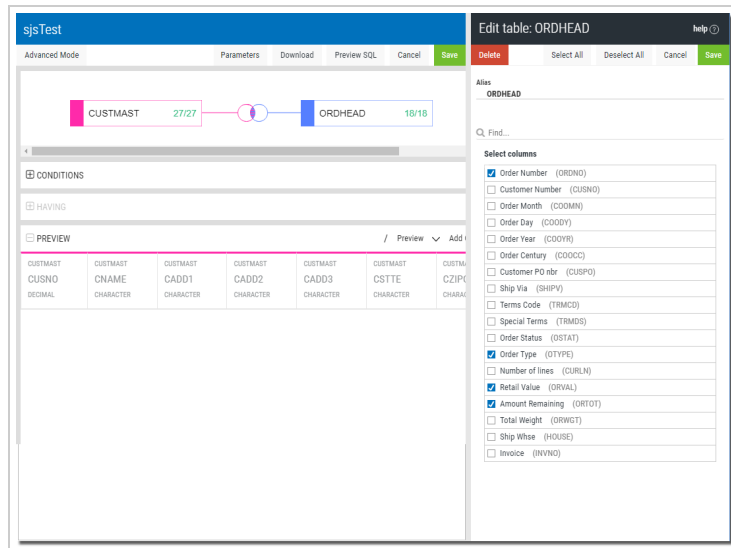


2. Check or uncheck individual column names, or press the **Select All** or **Deselect All** buttons to add and/or remove columns.
3. Press **Save**  when finished.


## Apply a Function to a Column


### Steps

1. For the column you wish to alter, simply click on the header of the column in the results section.



The Column Setting panel opens on the right.

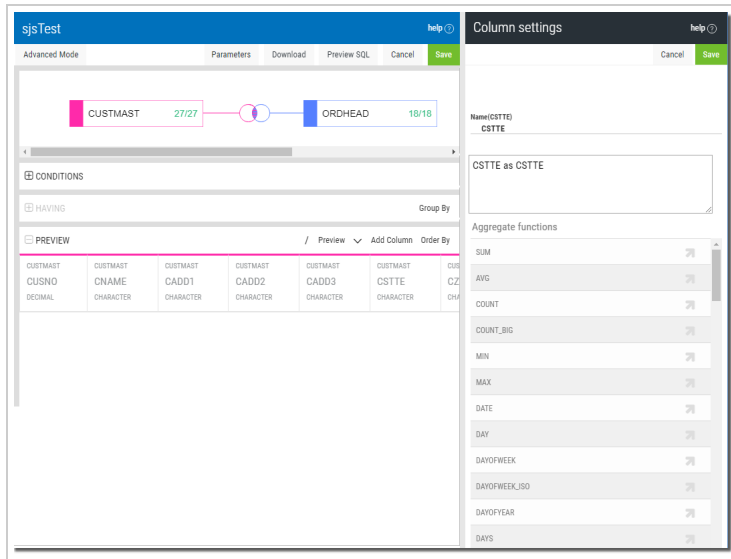

2. Select a function from the drop-down list. If you hover over the function you will see a brief description and syntax.  
[pic]
3. Once selected you will have to edit to make sure the starting field is placed inside the function correctly.  
[pic]
4. Press **Save**  when finished.


## Add (create) a New Column

New columns can be created by applying function to existing columns, or modifying columns using numeric or character functions.

## Steps

1. Press the **Add Column**  button.

The Column Setting panel opens on the right.

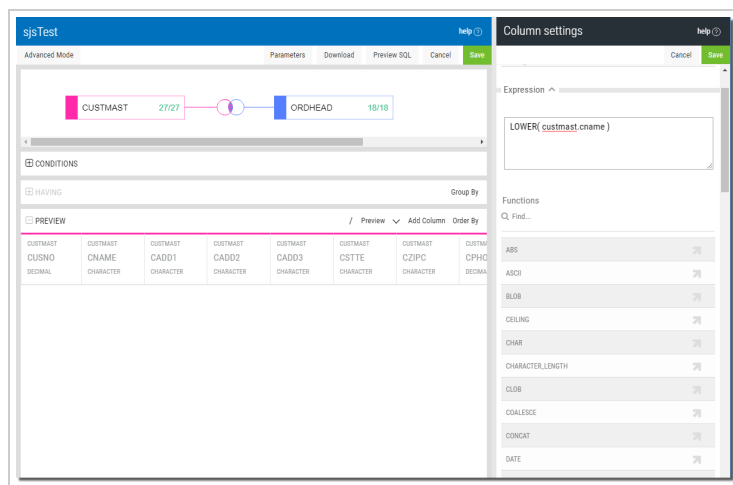

2. Enter a **Name** for the new column.
3. Select a function from the drop-down, and replace the 'expression' with a column name.
4. Press **Save** Save when finished.

## Add Grouped Results

A grouping query allows you to identify the fields that group records into sets so that the aggregate functions (SUM, MIN, MAX, etc.) added to columns can present total results for the group. Grouping records into sets can be very useful when you want to create "summary only" queries. In a grouped query you can count records, calculate totals or averages, or find the highest or lowest values within each record set.


Also, you can enable [drilldown](#) in grouping queries that can be used as the datasource for interactive charts and graphs in Insite Dashboards.

The process below is the same for new queries, and for [modifying](#) existing queries (once opened in the editor).


### Steps

1. Once in the Query Editor (see [Create a New Query on page 17](#) for information) press **Group By** button Group By.

The Group By panel opens on the right.

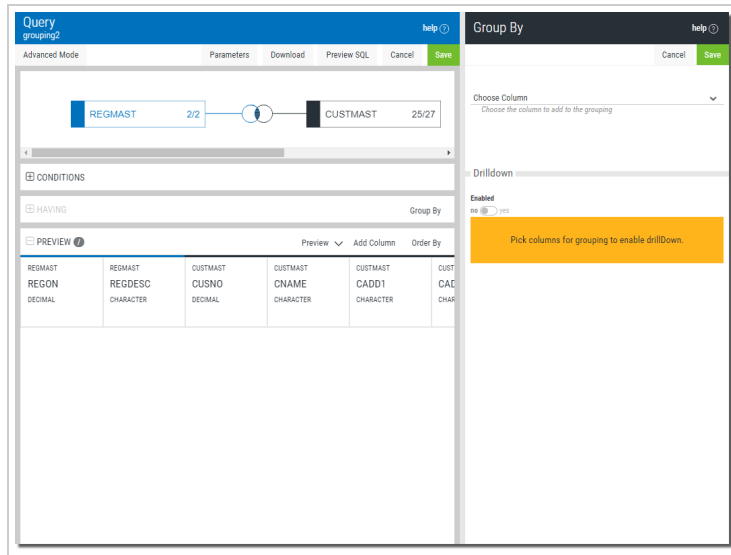

2. Click **Choose Column** to use the drop-down list to select a column(s) for grouping.

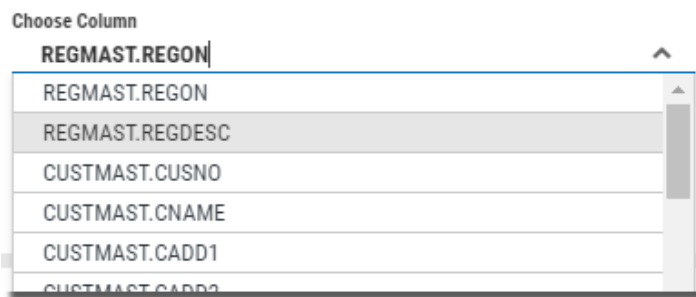

**NOTE:**

Depending on the number of columns in the SELECT, you may see a warning about any fields you did not select for grouping. Any columns not added to the GROUP BY, or part of a grouping expression (SUM, AVG, MIN, and so on) will be removed from the SELECT.

Following fields taken from select and not added to Group By will be dropped. Add to Group by in order to keep them:  
REGMAST.REGION, CUSTMAST.CUSNO, CUSTMAST.CNAME, CUSTMAST.CADD1 and 22 more.

- a. (optional) Click the **Enabled** switch in the Drilldown section to enable Drilldown.

Drilldown

Enabled

no ☒ yes

Lookup

- b. Press **Lookup**  to display a list of columns from the selected query files.


Place a check next to any of the columns you want to make available for drilldown in a dashboard using this query as a datasource.

Select Column help ?

Cancel Save

Search...

<input type="checkbox"/>	REGMAST
<input type="checkbox"/>	REGON
<input checked="" type="checkbox"/>	REGDESC
<input type="checkbox"/>	CUSTMAST
<input type="checkbox"/>	CUSNO
<input type="checkbox"/>	CNAME
<input type="checkbox"/>	CADD1
<input type="checkbox"/>	CADD2
<input type="checkbox"/>	CADD3
<input checked="" type="checkbox"/>	CSTTE
<input type="checkbox"/>	CZIPC

- c. Press **Save**  to see a list of the selected drilldown columns. You can press **Lookup** to add more, or **X** to remove.

Drilldown

Enabled  
no ☒ yes Lookup

<input checked="" type="radio"/> REGMAST.REGDESC	X
<input type="radio"/> CUSTMAST.CSTTE	X
<input type="radio"/> CUSTMAST.CTYPE	X

3. Press **Save** Save when finished to close the Group By panel.

You may see a warning about extra columns on the SELECT clause like so:

Group By

There are columns that are selected but not included in Group By clause. Do you want them to be added in Group By?

Cancel Do not add columns Add columns

Press **Cancel** to add more columns to the GROUP BY.

Press **Do not Add Columns** to save the current grouping settings and leave the SELECT with extra columns (which will have to be removed manually).

Press **Add Columns** to add any remaining SELECT columns to the GROUP BY.

The editor displays the selected field in the Preview section.

⊕ Conditions

⊕ Having

⊖ Preview

CUSTMAST  
stateaaa  
CHARACTER

Grouped results can be filtered by creating a Having expression. See the topic [Add Record Selection Conditions on page 32](#) for more on this.

## Add Record Selection Conditions

Record selection condition expressions indicate which records from the underlying tables are chosen during query execution. In essence, an expression is evaluated as either true, false, or unknown for each record retrieved by the data manager. If it evaluates to a true condition, the record is accepted and returned. Otherwise, the record is rejected and another is retrieved from the database.

The processes below are the same for new queries, and for [modifying](#) existing queries (once opened in the editor).

## Create an Expression


### Steps

1. Once in the Query Editor (see [Create a New Query on page 17](#) for information) press the **Conditions** band.

The band will expand to display the expression builder.



2. Hover your mouse on the **Add Element** button  to view the available elements that make up and can be added to the condition expression.

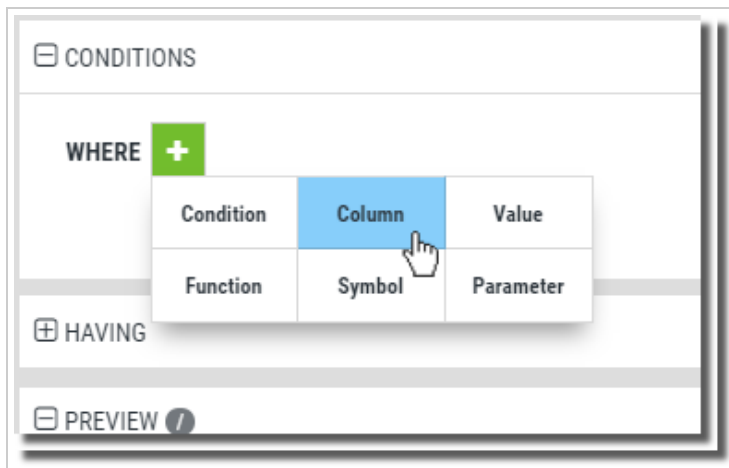

Select one of the following:



**Condition** - Choose from any of the standard or boolean conditions (AND, OR, =, <, >, and so on).


**Column** - Select a column from any of the tables used by the query.

**Value** - Enter a numeric or character value for the expression like, `filename.state = "IL"`.

**Function** - Aggregate functions such as SUM, AVG, MAX, MIN applied to a column can be part of a Where Condition.

**Symbol** - Use this to create expressions by adding the following symbols: ( ), + - / \* %.

**Parameter** - Add any parameters defined in the query (see [below](#)).


Each added element will provide you with an entry box—many with drop-down lists—in order to select different items for the element, to enter values, or insert parentheses. At the same time, a new **Add Element** button  displays so you can continue and add to the expression.



Most expressions are very simple and follow the form:

COL- COND - COL for example: `table.price > table.cost`

COL- COND - VAL for example: `table.price = 100`

3. Continue adding elements to complete the condition.
4. Press **Save**  when finished.

## Conditions for Grouped Results

Just as with detail queries, grouped queries can use expressions to filter the records returned. The HAVING condition is similar to the condition created above (for the WHERE clause), but it applies to the grouped records rather than the underlying "un-grouped" or detail records.

The tests allowed in the HAVING condition are the same as those allowed above with the addition of one more for aggregate functions.


### Steps

1. Press the **Having** band.

The band will expand to display the expression builder.



2. Hover your mouse on the **Add Element** button  to view the available elements that make up and can be added to the condition expression.

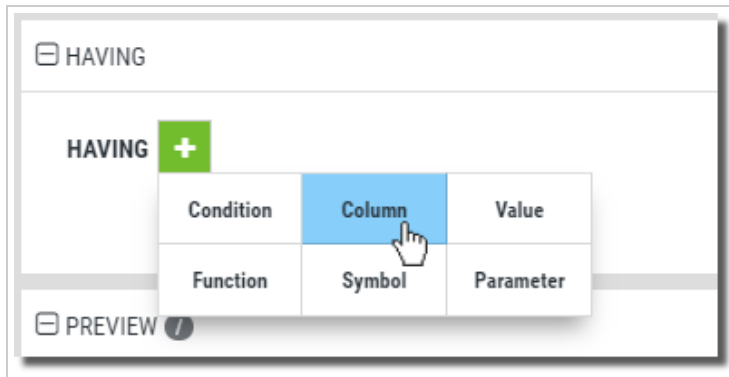

Select one of the following:

**Condition** - Choose from any of the standard or boolean conditions (AND, OR, =, <, >, and so on).


**Column** - Select a column from any of the tables used by the query.


**Value** - Enter a numeric or character value for the expression like, `filename.state = "IL"`.


**Function** - Aggregate functions such as SUM, AVG, MAX, MIN applied to a column can be part of a Where Condition.

**Symbol** - Use this to create expressions by adding the following symbols: ( ) , + - / \* %.

**Parameter** - Add any parameters defined in the query (see [below](#)).

Each added element will provide you with an entry box—many with drop-down lists—in order to select different items for the element, to enter values, or insert parentheses. At the same time, a new **Add Element**  button displays so you can continue and add to the expression.

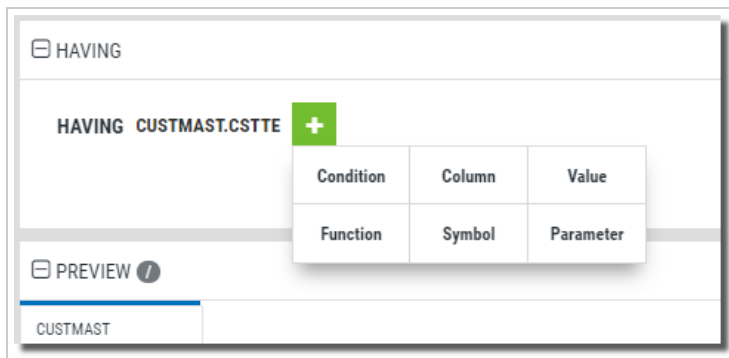

3. Continue adding elements to complete the condition.
4. Press **Save**  when finished.

## Conditions and Parameters


Parameters are a powerful addition to conditions and record selection. Parameters allow for user input when interacting with the query or the dashboard a query is added to. Once a parameter is [created and defined](#), it can be used in conditions.

The steps to add a parameter are the same as described above for the WHERE and HAVING clauses above.

Select **Parameter**.



Use the drop-down to select any defined parameters.

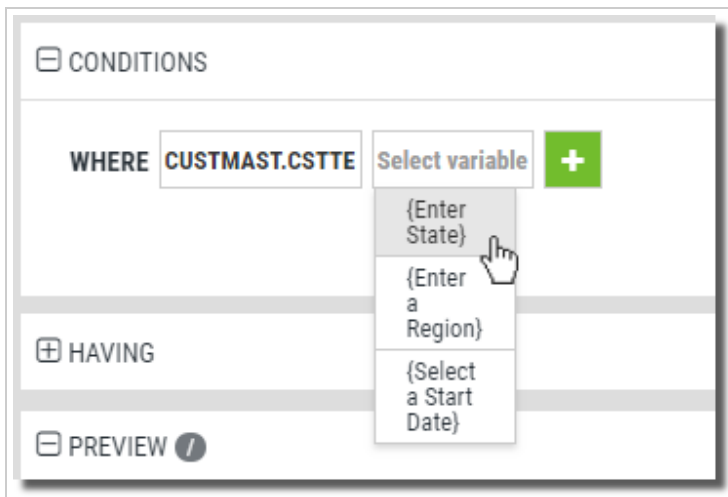

## Add Sorting


Sorting results will help you review the data when later working with the query output. Any column available to the query (selected or not) can be used for the sort.

The process below is the same for new queries, and for [modifying](#) existing queries (once opened in the editor).


### Steps

1. Once in the Query Editor (see [Create a New Query on page 17](#) for information) press the **Order By** button .

The Order By panel opens on the right.

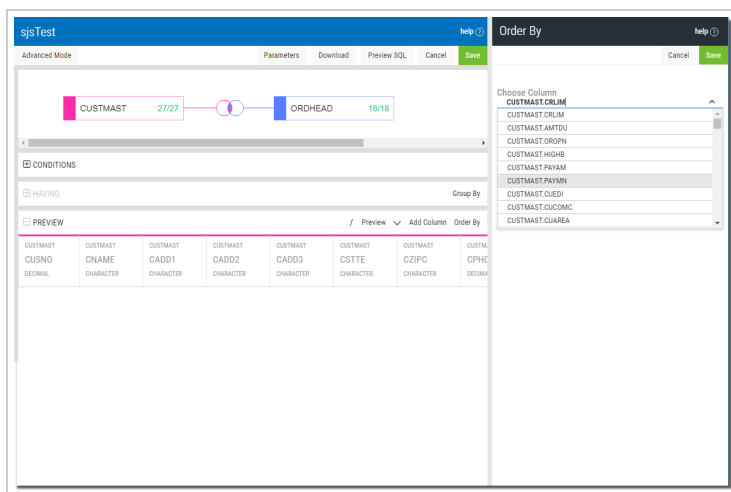

2. Use the drop-down list to select a column to sort on.  
Use the switch to choose **Asc**(cending) or **Desc**(ending).



3. Press **Save**  when finished.

## Add Parameters


Parameters can be added to a query to allow for different values to be used when the query is run (for export) and when being added to a dashboard.

Once created and defined, parameters are added to the [WHERE or HAVING](#) clauses for record selection. Parameters can be defined with an initial value which can be easily changed when added to a dashboard.

### Steps

1. Once in the Query Editor (see [Create a New Query on page 17](#) for information) press the **Parameters** button .

The Parameters panel opens on the right.

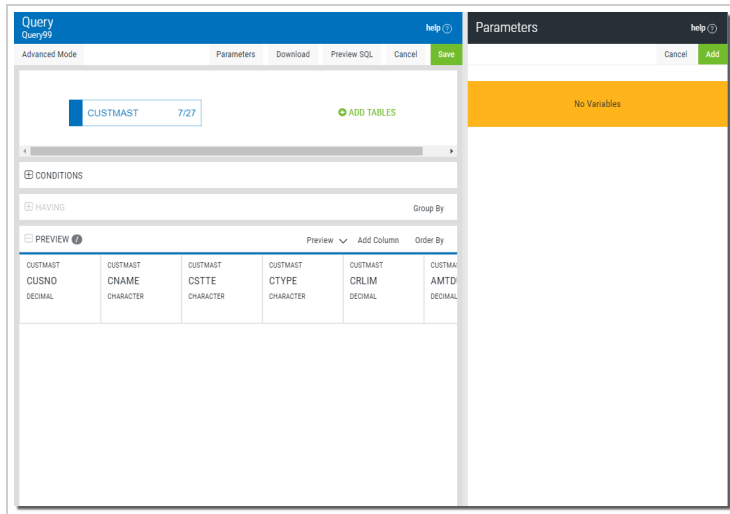

2. Press the **Add** button  to define a new parameter.

The New Parameter panel opens.

**New Parameter** help ?

Cancel OK

**Name**  
state\_var

**Display Name**  
Enter State Value

**Variable Type**  
STRING ▼

**Length**  
4

**Default Value**  
IL

3. Fill in the following to define the parameter:

**Name** - Give the parameter a name. This name is used internally and only alphanumeric characters (a-z, A-Z, 0-9)—not including punctuation or symbols—are allowed. Spaces are not allowed (an underscore \_ is a good substitute).

**Display Name** - This is the name seen by the user. It can be a single word, or as above, a phrase or command to instruct or ask the user for input.

**Parameter Type** - Use the drop-down to select one of the available types:

The screenshot shows a form for creating a new query. It has three main sections: 'Name' with the value 'state\_var', 'Display Name' with the value 'Enter State Value', and 'Variable Type' which is a dropdown menu currently showing a list of options: NUMBER, STRING (highlighted in blue), VALUESET, DBLIST, DATE, and DECIMAL.

**Number** - Use this type for numeric values.

**Min Value** : (optional) Specify a lower limit if you want to restrict choices to a range of numbers.

**Max Value** : (optional) Specify an upper limit if you want to restrict choices to a range of numbers.

**String** - Use this type for character data.


**Length** - Specify the maximum length of the parameter value.

**Valueset** - Use this type to provide a (user) defined list of parameter values.


**Value Type**: Use the drop-down to select the type of data for the parameter. Only three types are valid: Number, String, and Date.

**Multiple**: Set to allow for multiple selections.

**Select All**: Set to all for selection of all available values.


**Add Button**  : Press the Add (values) button to enter a value for the list presented to the user. Press **Save**. Repeat for each value needed.


**Dblist** - This type allows a column from a file to provide a list of parameter values.

**Column**: Choose a column from which to select a value for the parameter. Use the **Lookup** button  to choose a column name.

**Multiple**: Set to allow for multiple selections.

**Date** - Use this type for date values.

**Start**: (optional) Use the **Calendar** button  to specify a lower limit if you want to restrict choices to a range of dates.


**End**: (optional) Use the **Calendar** button  to specify an upper limit if you want to restrict choices to a range of dates.

**Decimal** - Use this type for numbers with decimals.

**Min Value** : (optional) Specify a lower limit if you want to restrict choices to a range of numbers.


**Max Value** : (optional) Specify an upper limit if you want to restrict choices to a range of numbers.

**Default Value** - Specify an initial value for use by the parameter. Make sure the value conforms to the selected Parameter Type.


4. Press the **Save** button to save the parameter definition and return to the Parameters panel.
5. Press the **Add** button  to create another parameter, or press **Cancel** to return to the query editor display.

## BRMS Query Templates

BRMS query templates are available for creating new queries provided you have IBM BRMS, and you have at least one defined BRMS [data connection](#).

A drop-down option  becomes available so you can add a new query from a template

 . Selecting this options displays a list of available template queries like so:

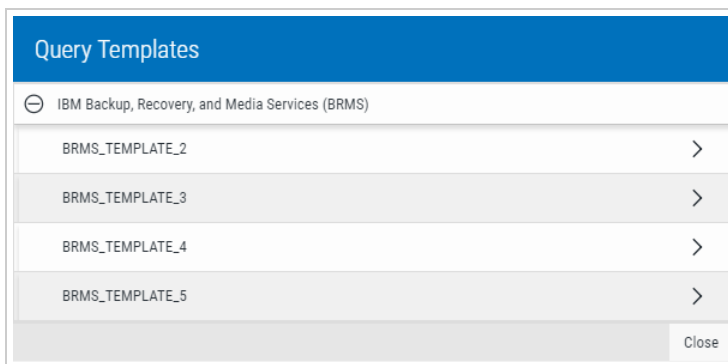

Designed to save time, these templates are starting points that have many elements of the query already defined for you like the data connections, selected tables, join statements, selected columns and more.

Once you select a template you can continue defining the remainder of the [query attributes](#) as you would for any new query.


## Edit Existing Queries


You will use the query editor to edit an existing query in the same manner it was used to create the query. You might want to edit your query by:



- Modifying the query attributes like name, description, tags, sharing and edit rights
- Adding or removing tables
- Changing the join
- Modifying columns

- Modifying record selection conditions
- Removing or Modifying Sorting
- Adding Grouping.

## Steps


1. To edit any query for any of the items above you have to press the **Show Actions** button  located on the left of each query, and select the **Edit Query** option. The option first displays the Edit Query panel on the right.

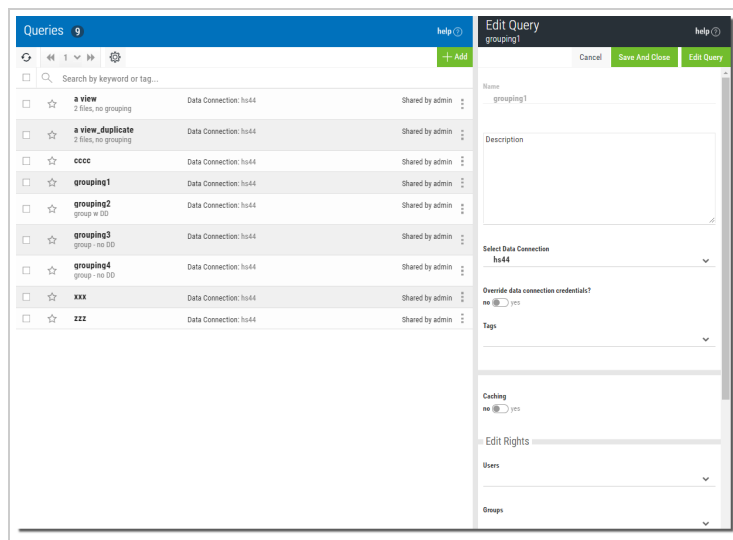

2. Modify the Query Attributes (optional)  
This initial panel allows for quick changes to the name, description, data connections, tags, caching, groups, and so on. See [Query Attributes on page 17](#) for more information on the items in this panel.  
To save query attributes without opening the editor, press the **Save and Close** button  .
3. Press the **Edit Query** button  to open the query editor.



The query editor displays.

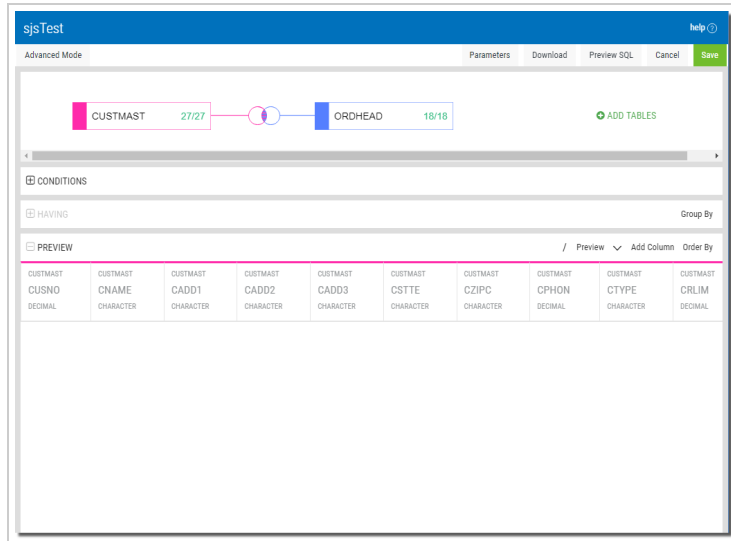

From here you can now modify the query in any of the following areas:

- [Add or Remove Tables on page 41](#)
- [Modify or Delete the Join on page 42](#)
- [Modify Columns on page 43](#)
- [Modify Record Selection Conditions on page 45](#)
- [Modify the Sort on page 46](#)
- [Modify Grouping on page 45](#)
- [Modify Parameters on page 47](#)

## Add or Remove Tables


### Add Tables



To add tables to a query, press the **Add Table** button  and follow the steps detailed in the topic, [Add Tables on page 23](#).

### Remove Tables

1. In the Query Editor press the table icon  representing the table you want to remove.


The Edit Table panel opens on the right.

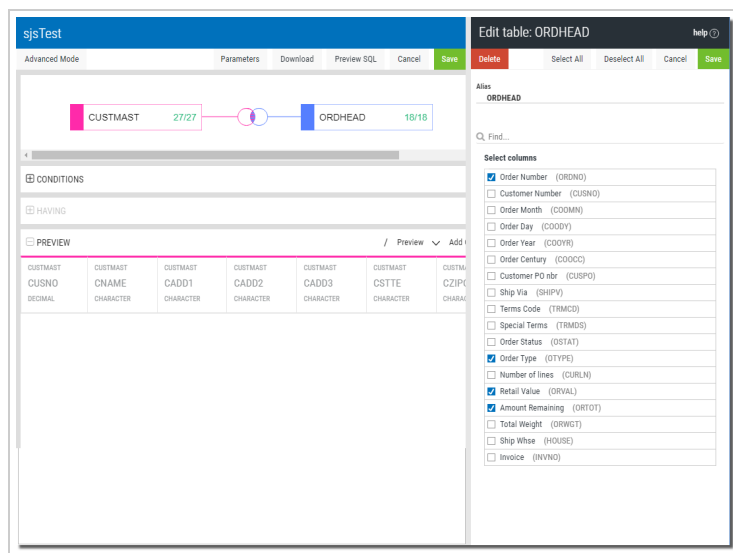



2. Press the **Delete** button .
3. Press **Save**  when finished.

## Modify or Delete the Join

1. In the Query Editor press the join icon between any two file pairs. The Modify Join panel opens on the right.

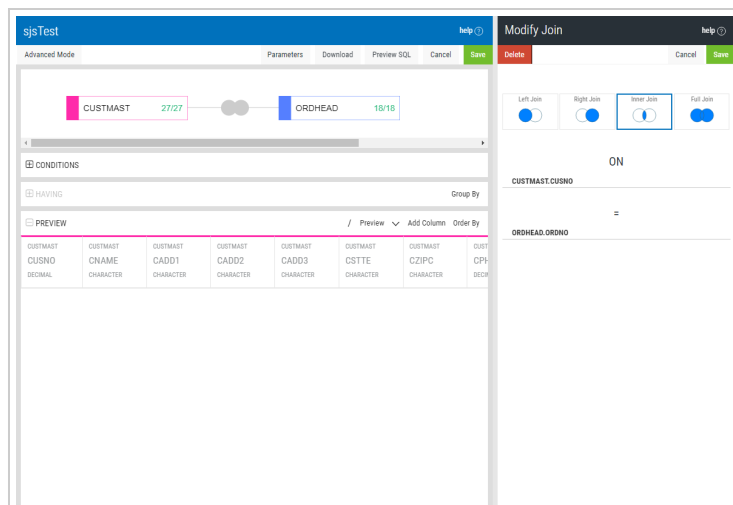



2. To modify the current join, select a different join type and press **Save** .
3. To remove the current join, simply press the **Delete** button .


# Modify Columns

## Adding Columns


You have two options:


- To add columns from the current tables in the query, press the table icon  for the table containing the columns you wish to work with, and follow the steps detailed in the topic, [Select Existing Columns on page 26](#).
- To add a new column (create), press the **Add Column** button , and follow the steps detailed in the topic, [Add \(create\) a New Column on page 27](#).

## Remove Columns

- Press the table icon  for the table containing the columns you wish to work with.


The Edit Table panel opens on the right showing all the columns in the table.

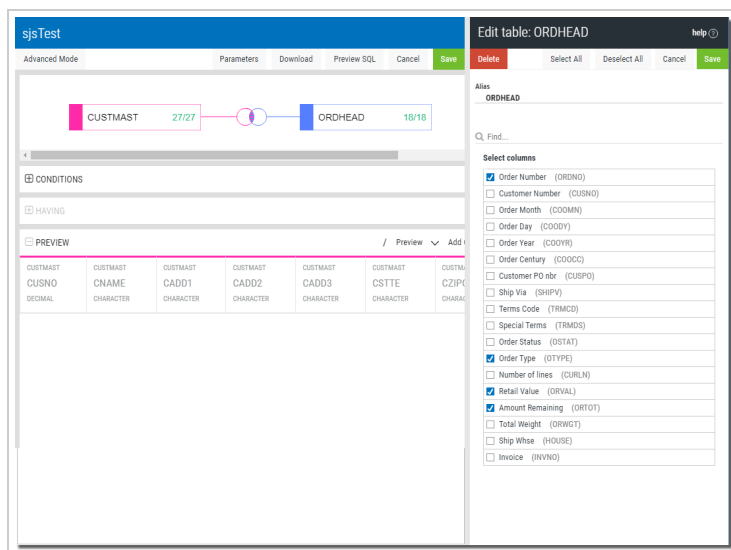


- Uncheck individual column names, or press the **Deselect All** buttons to remove columns.
- Press **Save**  when finished.

## Rename a Column

- Press the column you wish to alter.



The Column Setting panel opens on the right.

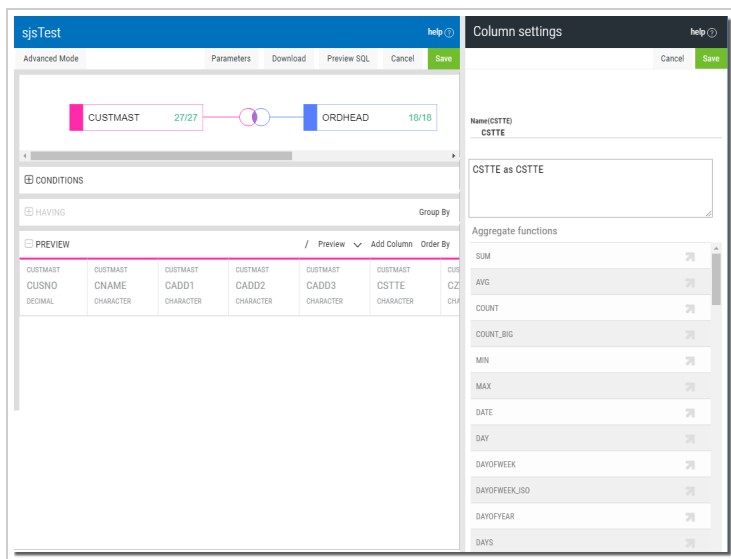


2. Change the Name value and press **Save** Save.


Repeat this process for each column you wish to change.

## Re-sequence Column Order

1. Hover over the column you wish to move.  
Notice movement handles appear on each side of the column.

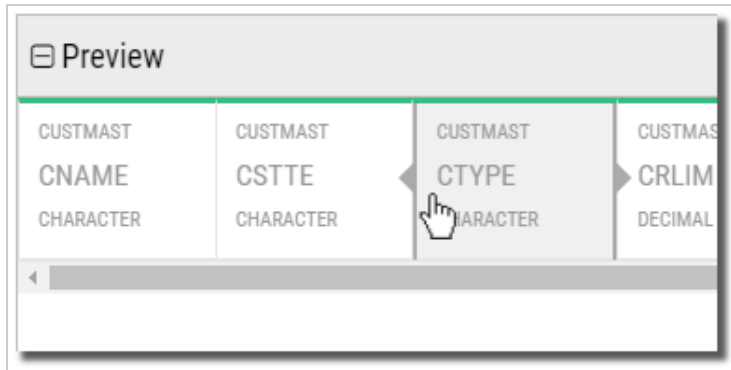

2. Click-and-drag the right arrow to move the column to the right, or click-and-drag the left arrow to move the column to the left.  
As you move over other columns they will move to allow the selected column to be inserted.

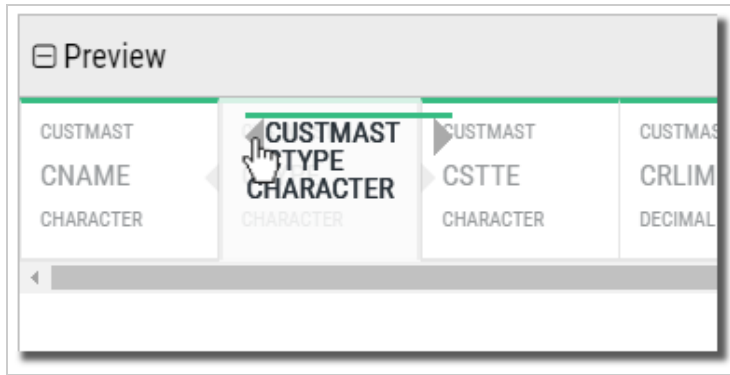

- Drop the column between or next to any other existing column.

## Modify Grouping

Modify the columns in a Grouping Query just as you would for any query. You can rename, remove, and add new columns to the query.


See [Modify Columns on page 43](#), and [Modify Record Selection Conditions on page 45](#) for more information.

## Modify Record Selection Conditions

Each element of a Condition or Having expression can be moved or removed.


### Steps

- Expand the band you wish to edit (Conditions or Having).  
The Full condition is exposed.

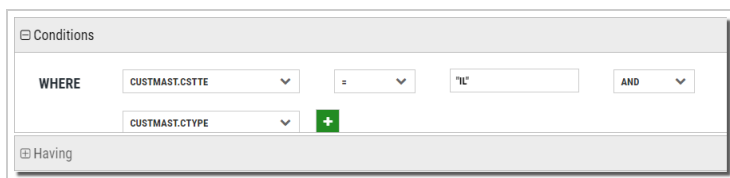


- Simply hover over the element to reveal the two controls on the left of the element.




- Press the **X** to remove, or select the 4-headed arrow to drag and move the element to a different location in the expression. Depending on the element, you can use the drop-down to select a different value or condition.
- Press **Save**  when finished.


## Modify the Sort


1. In the Query Editor press the **Order By** button  .

The Order By panel opens on the right.

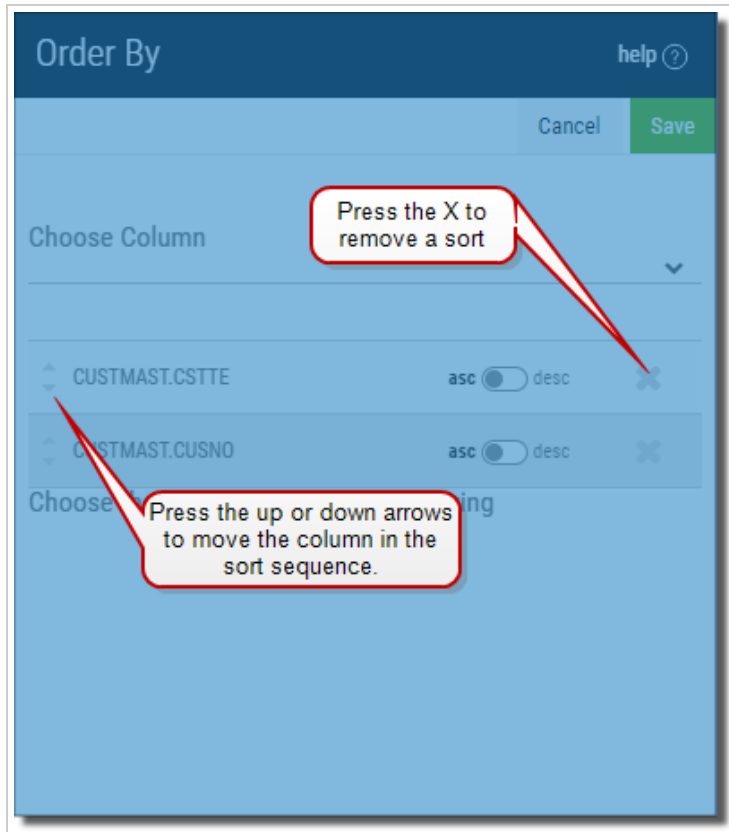


2. **To Add:** Use the drop-down list to select another column to add to the sort. Use the switch to choose **Asc**(ending) or **Desc**(ending).

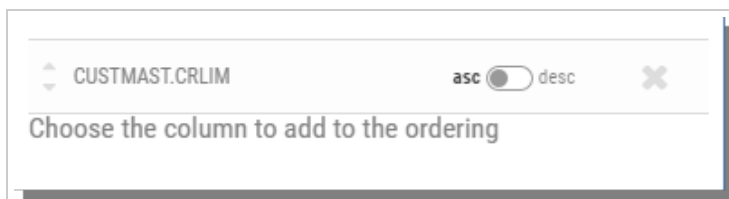


3. **To Remove:** Press the X on the right of any existing column to remove it from the sort.
4. **To Re-sequence:** Press the up and down arrows to the left of the column to change its position in the sort.
5. Press **Save**  when finished.

# Modify Parameters

In the Query Editor press the **Parameters** button . The Parameters panel opens on the right.

Existing parameters are listed at the top, and each parameter along with its default value is shown in the Preview Parameters section.

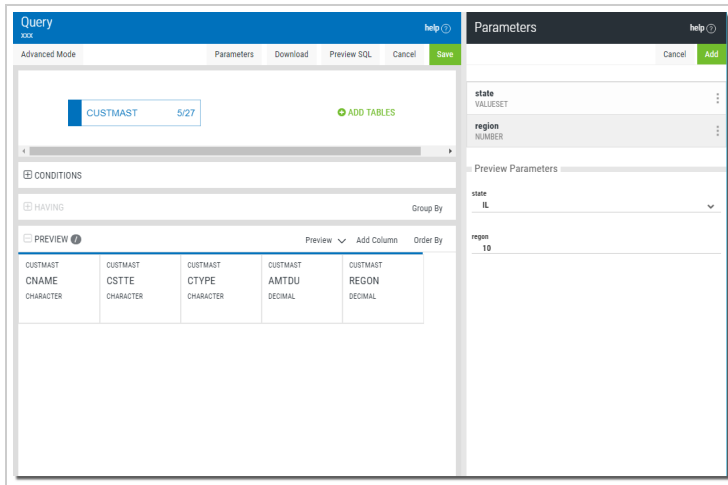


## Add a Parameter

Press the **Add** button  to [create a new parameter](#).


## Remove a Parameter

Press the **Show Actions** button  and select **Delete**. You will be prompted to confirm this option.

## Modify an Existing Parameter

1. Press the **Show Actions** button  and select **Edit**, or single click a parameter.

The New Parameter panel opens.

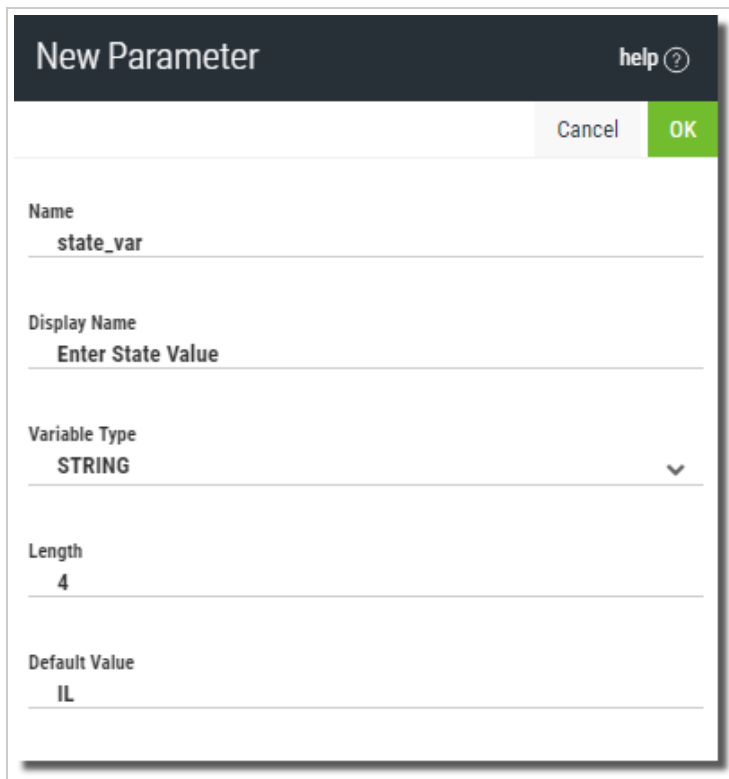

The image shows a 'New Parameter' dialog box with a dark header bar containing the title 'New Parameter' and a 'help ?' link. Below the header, there are 'Cancel' and 'OK' buttons. The main area contains five labeled input fields: 'Name' with the value 'state\_var', 'Display Name' with the value 'Enter State Value', 'Variable Type' with a dropdown menu showing 'STRING', 'Length' with the value '4', and 'Default Value' with the value 'IL'.

Field	Value
Name	state_var
Display Name	Enter State Value
Variable Type	STRING
Length	4
Default Value	IL

2. Add or change any of the available options (these are described in the section on [Adding Parameters.](#))
3. Press **OK** to save.




# Data Connection Management


Data connections define the link between your queries and the different systems and databases across your network where your data is stored. Refer to this section to create, manage and edit data connections for Insite Analytics.

## Data Connections Interface


Select the **Data Connections** option **Data Connections** in Insite Analytics to display a list of data connections like so:

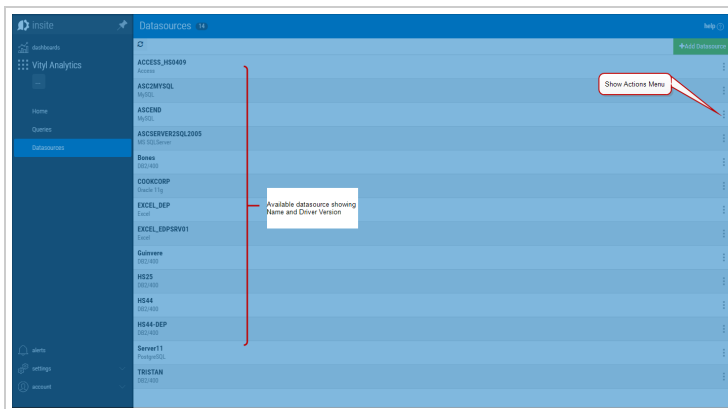


On this screen you can see the following:

- List of data connections with their name and driver type.
- Show Actions menu. Click  to access the following functions: [Edit the Data Connection](#), and Delete.

## Work with Data Connections

Working with data connections is very simple. You will either delete, modify or create them. To create a data connection press the **Add Data Connections**  button. This process is discussed in detail in the topic [Create a New Data Connection on page 50](#).

To edit the datasoure, edit permissions, or delete a data connection you will use the Show Actions menu located on the right for each data connection. Press the **Show Actions** button  to access the following functions:

### Edit

Select this option to open and modify the data connection. See [Edit Data Connections on page 55](#) for more detailed information.

## Delete


Select this option to delete the data connection. You will be prompted to confirm or cancel your request.


## Create a New Data Connection

Creating new data connections is simple with Insite Analytics. You can create a connection to data on many systems such as IBM i, MySQL, MS SQLServer, MS Access, Oracle (12g), and others.

To create a new data connection press the **Add Data Connection** button  at the top of the data connections panel.

The New Data Connection panel opens on the right.

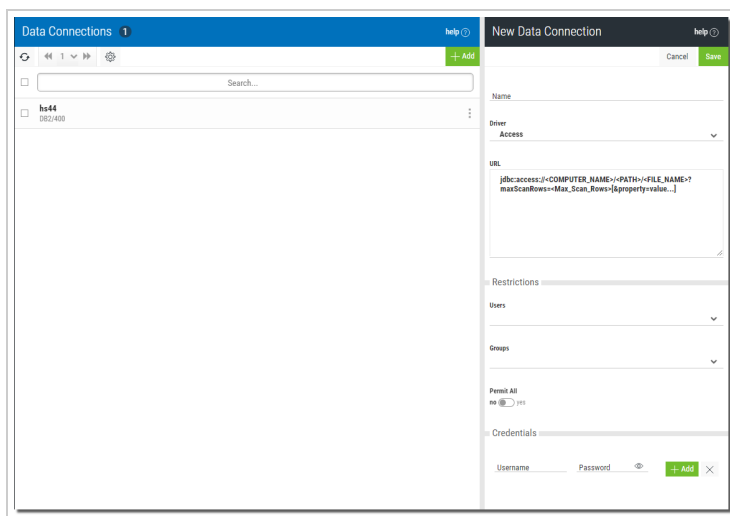

Fill in the options (described below) to define the data connection, and press **Save**  to continue.

### Options

**Name** - Enter a name for the data connection. Only alphanumeric characters (a-z, A-Z, 0-9)—not including punctuation or symbols—are allowed. Spaces are not allowed (an underscore \_ is a good substitute).

**Driver** - Select the driver based on the type of database you wish to use.

**URL** - This is a string that defines the location of the server and the database you want to connect to. The syntax of the string is very specific depending on the type of database defined by the Driver value specified (below). Review the list below for the syntax of each Driver (database) type.

### Access

**Syntax Example:**

```
jdbc:access://<COMPUTER_NAME>/<PATH>/<FILE_
NAME>?maxScanRows=<NN>
```

**Where:**

<COMPUTER\_NAME> = The name of PC, as identified to the network where the Access or Excel file is located. This value is mandatory.

<PATH> = The full path (including drive letter) to the directory containing Excel or Access files. On Windows, there must be a "Share" to the path on <COMPUTER NAME> that the IBM i profile running the job has authority to.

<FILE\_NAME> = Add the specific name of the file to use with the connection. This value is mandatory.

<NN> = The maximum number of rows to return.

**BRMS****Syntax Example:**

```
jdbc:as400://<HOSTNAME>;prompt=false;extended metadata =
true;translate binary = true;libraries=<LIB_LIST>
```

**Where:**

<HOSTNAME> = The name of IBM i host.

<LIB\_LIST> = Specify libraries to override the user's default library list.

**DB2/400****Syntax Example:**

```
jdbc:as400://<HOSTNAME>;prompt=false;extended metadata =
true;translate binary = true;libraries=<LIB_LIST>
```

**Where:**

<HOSTNAME> = The name of IBM i host.

<LIB\_LIST> = Specify libraries to override the user's default library list.

**Excel**

**Syntax Example:**

```
jdbc:excel://<COMPUTER_NAME>/<PATH>/<FILE_
NAME>?maxScanRows=<NN>
```

**Where:**

<COMPUTER\_NAME> = The name of PC, as identified to the network where the Access or Excel file is located. This value is mandatory.

<PATH> = The full path (including drive letter) to the directory containing Excel or Access files. On Windows, there must be a "Share" to the path on <COMPUTER NAME> that the IBM i profile running the job has authority to.

<FILE\_NAME> = Add the specific name of the file to use with the connection. This value is mandatory.

<NN> = The maximum number of rows to return.

**MS SQL Server****Syntax Example:**

```
jdbc:sqlserver://<HOSTNAME>:<PORTNUMBER>;<INSTANCENAME>
```

**Where:**

<HOSTNAME> = The network resolvable name or address of the SQLServer host.

<PORTNUMBER> = The TCP/IP port for the server. The listener port number is usually 1433.

<INSTANCENAME> = The network resolvable name or address of the SQL Server instance to be used. Omit the instance name portion if you are connecting to the default (usually MSSQLServer) instance.

**MySQL****Syntax Example:**

```
jdbc:mysql://<HOSTNAME>:<PORTNUMBER>/<DATABASENAME>
```

**Where:**

<HOSTNAME> = The network resolvable name or address of the MySQL host.

<PORTNUMBER> = The TCP/IP port for the server. The listener port number is usually 3306.

<DATABASENAME> = The name of the database to be accessed.

**Oracle 11g/12g**

**Syntax Example:**

```
jdbc:oracle:thin:@<HOSTNAME>:<PORTNUMBER>/<SIDNAME>
```

**Where:**

<HOSTNAME> = The network resolvable name or address of the Oracle host.

<PORTNUMBER> = The TCP/IP port for the server. The listener port number is usually 1521 and is defined in the network\admin\listener.ora file in the oracle product library.

<SIDNAME> = The name of the service (often ORCL).

**PostgreSQL****Syntax Example:**

```
jdbc:postgresql://<HOSTNAME>:<PORTNUMBER>/<DATABASENAME>
```

**Where:**

<HOSTNAME> = The network resolvable name or address of the PostgreSQL host.

<PORTNUMBER> = The TCP/IP port for the server. The listener port number is usually 3306.

<DATABASENAME> = The name of the database to be accessed.

**Permissions** - By default, permission to use a data connection is limited to the Admin user and the creator of the data connection. This option defines who else is allowed to use the data connection.

**Users:** Choose any of the listed users to allow usage rights to the data connection.

**Groups:** Choose any of the listed groups to allow usage rights to the data connection.

**Permit All** - Select whether to allow all users access to the data connection.

**Yes:** Select to allow all users to use the data connection.

**No:** Default. Select to allow only the Admin, creator, and any specified users or groups to use the data connection.

**Credentials** - For the host/server defined in the URL above, enter a valid **Username** and **Password** of the user that will process requests by this data connection.

**Username:** Enter a valid username to process requests on the selected server.

**Password:** Enter the password for the user.

**Test:** Press the **Test** button  to test the connection.

**NOTE:**

This credential can be overridden by defining an [Override Credential](#) in the query definition.



**TIP:**

If you want to define different users (with different levels of access) for connection to the same server it is better to create multiple data connections to the server—each with a different defined credential. Be sure to use descriptive names to differentiate between the multiple connections. Although the user can be overridden in the query, this should be used sparingly. In the case where passwords expire you will only have to update the data connection vs. updating many queries that have user overrides.


# Edit Data Connections


The process to edit a data connection is very similar to create one.

## Steps

1. To the right of the data connection you wish to edit, press the **Show Actions** button  and select **Edit**  .

The Edit Data Connection panel opens on the right.

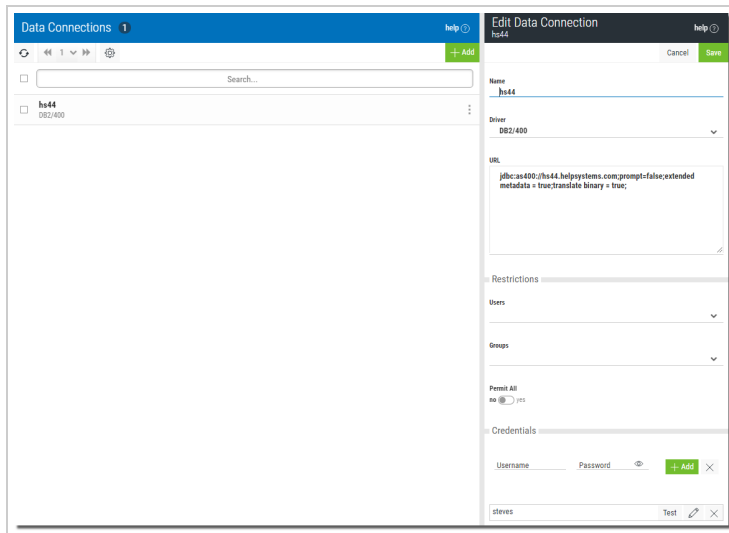

2. Modify any of the items in the panel. All the options are discussed in the topic [Create a New Data Connection on page 50](#).
3. Press **Save**  when finished making changes.





# Index

## A

- Active Users 9
- Add Columns 25
- Add Parameters 36
- Add Tables 23
- Advanced Mode 21

## C

- Caching 19
- Columns
  - Add 25
  - Add Function 26
  - Create 25, 27
  - Modify 43
  - Re-sequence Order 44
  - Remove 43
  - Rename 43
- Conditions 32
- Create
  - Data Connection 50
  - Query 17
- Create Columns 25
- Credentials 53

## D

- Data Connection 18, 49-50
  - Delete 50
  - Edit 49, 55
  - Override 19

## Delete

- Columns 43
- Data Connection 50
- Join 42
- Query 16
- Tables 41
- Download 15, 22
- Drilldown 28
- Drilldownn 30
- Driver 50
- Duplicate Query 14

## E

- Edit Rights 20

## F

- Favorites 13
- Filtering 12
- Full Join 25

## G

- Get the Latest Version of ViewPoint 6
- Group Actions 12
- Grouped Results 28
- Grouping
  - Modify 45
- Groups 20

## H

- HAVING 33

## I

- Inner 25

## Interface

Datasources 49

Query Builder 11

**J**

## Join

Add 24

Delete 42

Modify 42

Join Tables 24

Join Types 25

**L**

Left Join 25

## Licenses 8

Add 9

Delete 9

**M**

Manage Tags 14

## Modify

Columns 43

Conditions(record selection) 45

Grouping 45

Join 42

Sorting 46

**O**

Override Data Connection 19

**P**

Parameter Types 37

## Parameters 22

Add 36

In Conditions 34

Modify 47

Remove 47

Preview Results 22

Preview SQL 22

**Q**

## Queries

Create New 17

Edit 39

Work With 12

## Query

Duplicate 14

Query Attributes 17

Query Editor 20

Query Editor Layout 20

**R**

Re-sequence Column Order 44

Record Selection 32

Rename Columns 43

Requirements 6

Right Join 25

**S**

Search 12

Sharing 20

## Show Actions

Data Connections 49

Query 13

Sorting 35, 46

**T**

Tables 23  
    Add 23  
    Join 24  
    Remove 41  
Tags 13, 19  
    Manage 14

**U**

URL 50-51  
Users 20, 53

**V**

Version 5  
    Of Vityl Analytics 5  
Version Update 6

**W**

Web Update 6  
Welcome 5  
WHERE 33  
Wizard Mode 21